

50/60HZ PCB MOUNT TRANSFORMERS-EI RANGE

22W EI60-21-FE6021 SERIES

FEATURES :

- . CE/VDE approved
- . Potted under vacuum
- . Dielectric strength- 4000Vrms
- . Meet with UL94V-0 flammability requirements
- . Insulation class- class B (130)

PACKAGE :

- . Bulk packing


Custom design available

ELECTRICAL CHARACTERISTICS (@ 25°C)

PRIMARY VOLTAGE: 230						PRIMARY VOLTAGE: 115					
Part Number	Secondary voltage V	Secondary Current m A	No-load voltage V	Ambient Temperature °C	Rating VA	Part Number	Secondary voltage V	Secondary Current m A	No-load voltage V	Ambient Temperature °C	Rating VA
FE6021001	6	3667	6.8	T50B	22	FE6021101	6	3667	6.8	T50B	22
FE6021002	9	2444	10.3	T50B	22	FE6021102	9	2444	10.3	T50B	22
FE6021003	12	1833	13.7	T50B	22	FE6021103	12	1833	13.7	T50B	22
FE6021004	15	1467	17.1	T50B	22	FE6021104	15	1467	17.1	T50B	22
FE6021005	18	1222	20.5	T50B	22	FE6021105	18	1222	20.5	T50B	22
FE6021006	24	917	27.3	T50B	22	FE6021106	24	917	27.3	T50B	22
FE6021007	2 × 6	2 × 1833	2 × 6.8	T50B	22	FE6021107	2 × 6	2 × 1833	2 × 6.8	T50B	22
FE6021008	2 × 9	2 × 1222	2 × 10.3	T50B	22	FE6021108	2 × 9	2 × 1222	2 × 10.3	T50B	22
FE6021009	2 × 12	2 × 917	2 × 13.7	T50B	22	FE6021109	2 × 12	2 × 917	2 × 13.7	T50B	22
FE6021010	2 × 15	2 × 733	2 × 17.1	T50B	22	FE6021110	2 × 15	2 × 733	2 × 17.1	T50B	22
FE6021011	2 × 18	2 × 611	2 × 20.5	T50B	22	FE6021111	2 × 18	2 × 611	2 × 20.5	T50B	22
FE6021012	2 × 24	2 × 458	2 × 27.3	T50B	22	FE6021112	2 × 24	2 × 458	2 × 27.3	T50B	22

- . Frequency 50/60Hz
- . Split-bobbin
- . Potted under vacuum
- . Temperature clas to 70°C/B
- . weight:0.55kg

PHYSICAL CHARACTERISTICS

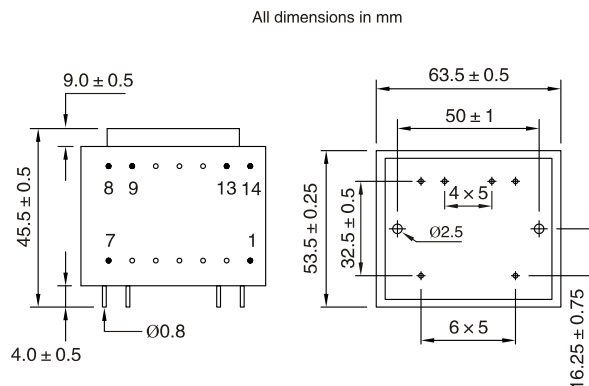

Recommended Drill-hole Diameter for 1.3mm pins
Recommended Drill-hole Diameter for Mountings=4mm

TECHNICAL INFORMATION




Fig 1




Fig 2