

承 認 書 SPECIFICATION FOR APPROVAL
--

客 戶：

MESSRS:_____

品 名：

NAME: 鋁質電解電容器

料 號：

PART NO: HP450M330B3530AAA

日 期：

DATE: 2021 年 4 月 25 日

承 認 印 APPROVED BY		
核 準	審 核	經 辦

承認後請寄回本書一份，謝謝！

Please return one copy with your approved signatures

陝西富拓电子科技有限公司
SHAANXI FULLSTAR ELECTRONICS CO., LTD

TEL：86-029-86676405

FAX: 86-029-86676405

Http: <http://www.xfullstartechs.com>

Numbering System

Please specify by complete number such as

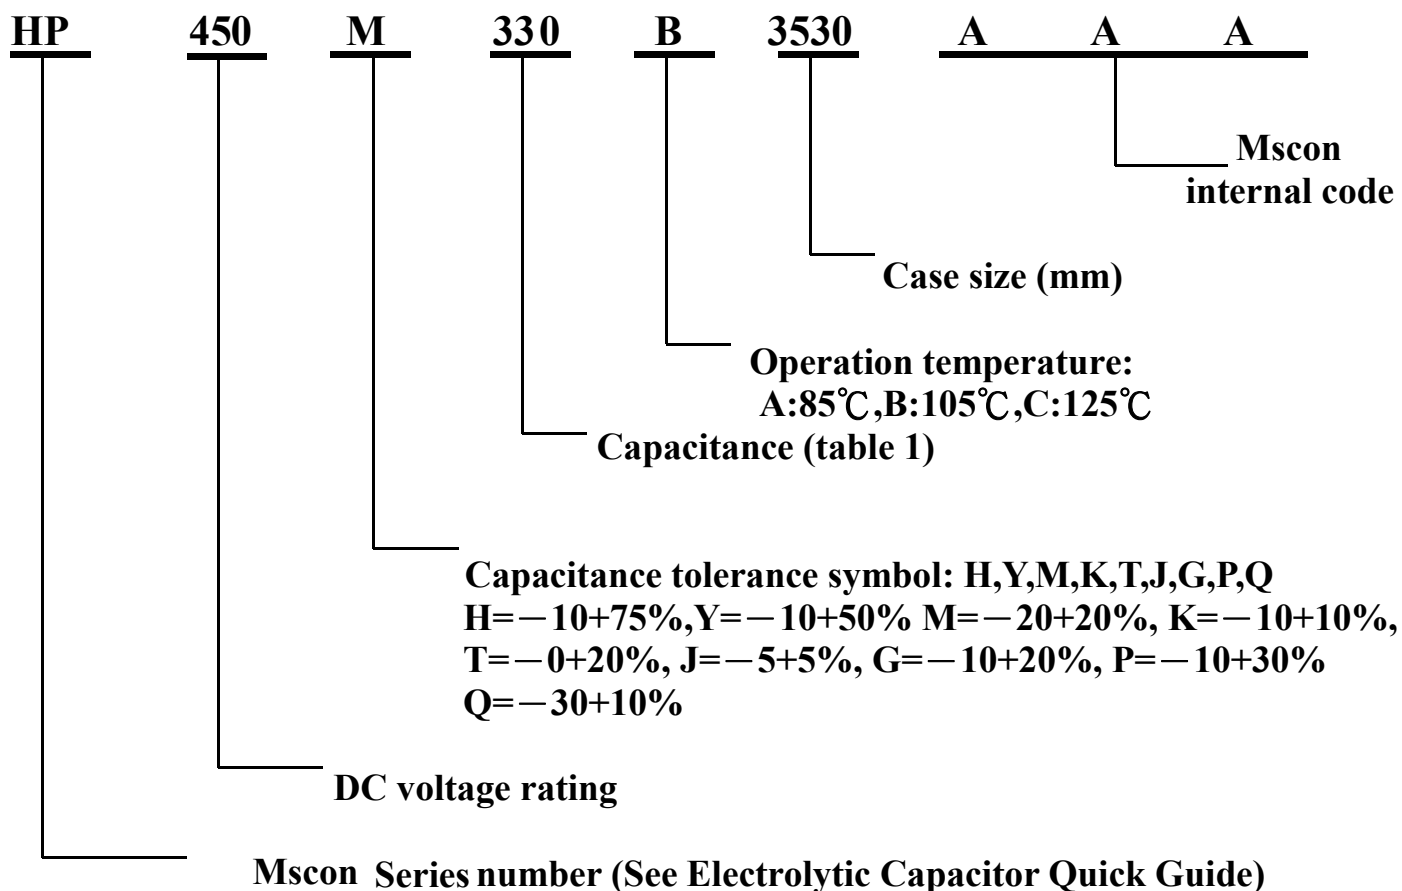


Table 1
Capacitance

Capacitance	Number
0.1 μ F	0R1
0.47 μ F	R47
1 μ F	001
4.7 μ F	4R7
47 μ F	047
470 μ F	470
4700 μ F	4K7
10000 μ F	10K
120000 μ F	12L

陕西富拓电子科技有限公司
SHAANXI FULLSTAR ELECTRONICS CO., LTD

TEL : 86-029-86676405

FAX: 86-029-86676405

樣品規格目錄

TO:

DATE:2021.4.25

序號	電容料號	規格	尺寸	數量	特性	備注
1	HP450M330B3530AAA	330/450V	35*30	10	牛角品	黑色膠管

陝西富拓電子科技有限公司
SHAANXI FULLSTAR ELECTRONICS CO., LTD
TEL : 86-029-86676405 FAX: 86-029-86676405

鋁電解電容參數檢測報告

AL.Electrolytic Capacitors Test Report

Customer 客戶：_____
Part No 客戶料號：_____
Series 系列：HP
Size 尺寸：Φ 35 X 30
Temperature Range 耐溫：-40 °C~+105 °C
CP Wire Dimension 引線直徑：1.5 mm

Produce Date 日期：2021 年 4 月 25 日
Mscon P/N 料號：HP450M330B3530AAA
Description 規格：330 μF 450 WV
QTY 數量：10 PCS
Cap. Tolerance 容差：-20 %~ +20 %
Inspection Warranty 檢驗依據：JIS C 5141

Test Condition 測試環境：

Temperature 溫度：23 °C
Relative Humidity 相對濕度：60 RH%
Frequency 頻率：120 HZ
Impedance(Z):(At25±5°C 100K HZ)阻抗：___Ω Max

CRITERIA 標準：

Cap. Range 容量範圍：264 μF~396 μF
Dissipation Factor 損失角：15 % Max
Leakage current 漏電流：1320 μA/2Min/ Max

TEST DATA 檢驗數據：

項目 Item 編號 NO:	Capacitance(μF) 靜電容量 264 μF~396 μF	Dissipation Factor(%) 損失角 ≤ 15 %	Leakage Current (μA) 漏電流 ≤ 1320 μA	Impedance(Z) 100K HZ(Ω) 阻抗 ≤ Ω	REMARK 備注 黑色 105 度
1	305.3	6.65	480		
2	307.2	6.68	490		
3	313.6	6.59	460		
4	311.6	6.66	460		
5	310.8	6.59	480		
6	312.6	6.83	490		
7	308.9	6.59	510		
8	306.7	6.81	490		
9	311.2	6.67	480		
10	306.9	6.83	520		
-X	309.48	6.69	486		
判定	OK				

LCR METER 容量測試儀名稱：Chen Hwa1062A

Leakage Current METER 漏電流測試儀名稱：Chen Hwa 202A CLC

核準 Approved By	復核 Checked By	檢驗 Test By

ESTIMATION 總判定：合格

陝西富拓电子科技有限公司
SHAANXI FULLSTAR ELECTRONICS CO., LTD

330 μ F 450 V

Size: 35 x 30

Feature

- working voltage range : **450 V**
- Surge voltage range : **500 V**
- Operating temp. . Range : **-40 to 105 °C**
- Rate capacitance range : **264 μ F to 396 μ F**
- DC leakage current (μ A) : **1320 μ A**
(After 2 minutes application of DC working voltage at 25°C)
- Dissipation factor : at **120 Hz, 25°C, 15 % (Max)**
- Ripple current : at **120 Hz, 105°C, 1640 mA**

Load Life (2000 hours)

Capacitance change.....Within 20% of initial value

Dissipation FactorNot exceed 200% of initial requirement


DC leakage current.....Not exceed the initial requirement

Shelf Life : 1000 hours no voltage applied

Capacitance change.....:within 20% of initial value

Dissipation Factor.....:Not exceed 200% of initial requirement

D C leakage current.....:Not exceed 500% of initial requirement

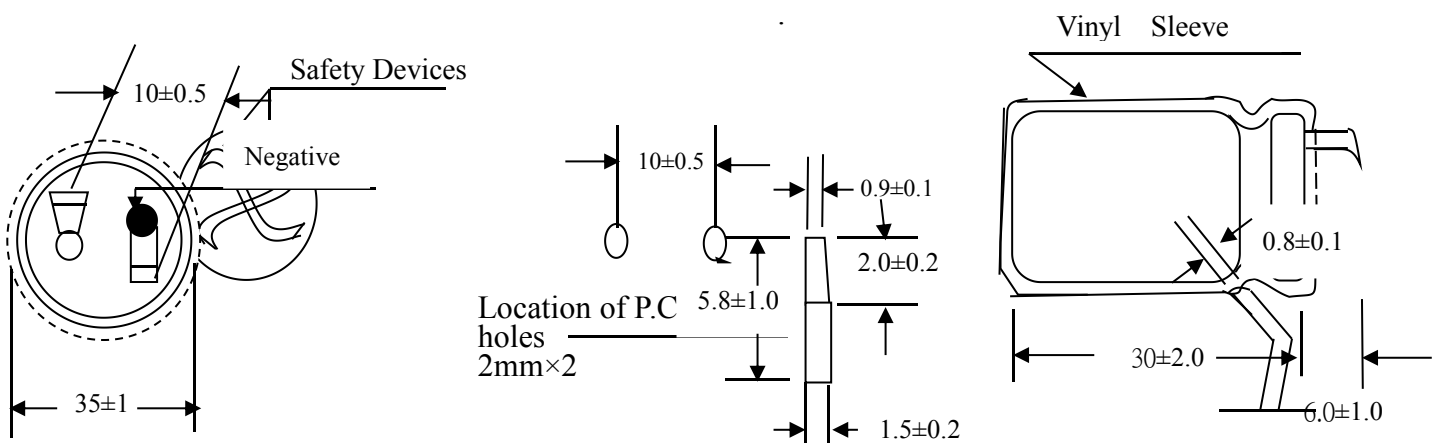

CORPORATION

Performance Characteristics

1. General Characteristics

1.1 Marking:

Capacitors shall be marked with Fullstar mark, rated capacitance, rated DC working voltage

The cathode lead will be identified with minus signs (-) on the side of the case

1.2 Operating Temperature Range:

These capacitors are designed to operate over a temperature range of -40 to +105°C

At -40°C capacitance shall retain at least 70% of their original 25°C measured capacitance. At +105°C, capacitance shall increase to no more than 120% of their original 25°C measured capacitance.

1.3 Vent Test(applies only to those capacitors with vents)

During and after the applicable test below (1.3.1) there shall be no explosion, flash, flame or expulsion of particles of the core or container

In addition, the case shall not be expelled from the core. If the capacitor under test is a multisection unit, this test shall apply to the input section only.

1.3.1 DC test, Capacitors with DC rating volts or less:

Both of the following tests shall be performed, but on separate test units.

1.3.1.1 Forward Bias Test;

The capacitor under test shall be connected to a DC power supply that has sufficient voltage to supply a constant direct current of 500 milliamperes with the positive terminal of the capacitor connected to the positive supply terminal and the negative capacitor terminal connected to the negative supply terminal. The constant current shall be maintained until (1) the capacitor vents, (2) 300 seconds have elapsed, or (3) the capacitor under test open circuits

1.3.1.2 Reverse Bias Test:

The capacitor under test shall be connected to a power supply with sufficient voltage to provide a Constant direct current of 500 milliamperes when the positive capacitor terminal is connected to the negative supply terminal and the negative capacitor terminal to the positive supply terminal. The constant current shall be maintained until (1) the capacitor vents, (2) 300 seconds have elapsed, or (3) the capacitor open circuits.

2. Mechanical Characteristics

2.1 Lead pull test:

2.1.1 That with diameter of lead wire less than 0.5mm and case size less than 10mm be capable of with standing a steady pull of 0.5kg for a period of 10 seconds.

2.1.2 That with diameter of lead wire between 0.6 to 0.8mm be capable of with standing a steady pull of 1kg for a period of 10 seconds.

2.1.3 That with diameter of lead wire larger than 0.8mm be capable of withstanding a steady pull of 2.5kg for a period of 10 seconds.

3. Electrical Characteristics

3.1 Standard Test Conditions:

Unless other wise specified all tests shall be performed at, or referred to an ambient temperature of 25°C and a relative humidity not greater than 50%

3.2 Capacitance and Dissipation Factor:

Measurements shall be made on a capacitance bridge capable of = 2% accuracy on capacitance and dissipation factor measurements.

Measurements shall be made at 120 HZ The RMS value of the AC measuring voltage shall not exceed 1.0 volt.

3.3 Leakage Current:

3.3.1 Pre-conditioning: Rated working voltage shall be applied to capacitors for a minimum period of 15 minutes duration at least 24 hours and not more than 48 hours before test.

3.3.2 Test: Measurements shall be made after 3 minutes charge at rated working voltage at 25°C with an application of a steady source of power.

3.4 Surge Voltage:

The surge DC rating is the maximum voltage to which the capacitor should be subjected under any condition. This includes transients and peak ripple at the highest line voltage.

3.4.1 Capacitors connect in series with 1000 ohm resisters shall with stand surge test voltage applied at the rated of 1/2 minute on, 4 1/2 minutes off, for 1000 successive test cycles at 25°C.

3.5 Humidity Test:

Capacitors shall be subjected to a temperature of 40±2°C at relative humidity of 95-98% for a period of 100 hours. Then air dried for 1 hour. Following this condition, capacitors shall meet the specified requirements for dissipation factor & DC leakage current, and the capacitance value shall not change more than 10%.

4. Life and Reliability Test

4.1 Life Test:

4.1.1 Rated voltage shall be applied to the capacitors for a period of 1000

hours while units are maintained at an ambient temperature of 105°C

4.1.2 Capacitors shall then be removed from the test chamber and return to room temperature.

4.1.3 The Capacitance shall then be measured in accordance with section 3.2 it shall not decrease to less than 80% of the capacitance at 25°C, measured prior to the test, nor shall it increase to more than 120% of the original 25°C value.

4.1.4 The dissipation factor shall be measured in accordance with section 3.2 The dissipation factor shall not exceed 150% of the initial requirement.

4.1.5 At the conclusion of the test, the leakage current shall not exceed the initial DC leakage current requirement Measurements shall be made in accordance with section 3.3.

4.2 Shelf Test:

After storage for 1000 hours at 105°C with no voltage applied the capacitance shall not decrease to less than 80% of the capacitance at 25°C and dissipation factor shall meet the initial requirements of section 4.1.4, the DC leakage current measured in accordance with section 3.3 shall not exceed 200% of the initial requirement for the capacitor (or not exceed the initial DC leakage current requirement).

5. Maximum Ripple Current:

5.1 Maximum RMS ripple current at 105°C 120Hz is given in the table

5.2 When capacitors are operated at temperatures other than 105°C, and frequency other than 120Hz, the maximum RMS ripple currents must be multiplied by the factors shown in below table

Ripple Current multiplier frequency. Vs Temp

FREQUENCY	TEMPERATURE				
Hz	25°C	45°C	65°C	85°C	105°C
60	1.4	1.2	1.0	0.8	0.6
120	2.0	1.7	1.3	1.0	0.7
400	2.2	1.9	1.4	1.1	0.8
1000	2.4	2.1	1.6	1.2	0.9
100K	2.6	2.2	1.7	1.3	1.0

6. Ripple Voltage:

Ripple voltage must not exceed the following:

The Sum of the DC voltage plus the AC ripple voltage must not exceed the rated DC voltage

The DC Voltage plus the peak AC voltage must not cause a voltage reversal more than 1.5 volts.

7. Insulating:

General series of aluminum electrolytic capacitors are covered with a vinyl sleeve or the like. And this Sleeve is used for marking, when the internal element or the container is needed to be insulated capacitors specially designed for insulation requirement are recommended to be used.

8. Soldering:

8.1 When soldering a printed circuit board with various components, too high soldering temperature or too long dipping times may cause secondary shrinking of the sleeve which unnecessarily exposes the container. Soldering is allowed to perform at less than 260°C for less than 10 seconds.

8.2 Soldering may melt or break the sleeve if the sleeve is contacted with circuit patterns. To avoid this trouble the capacitors are recommended to be slightly apart from the circuit boards.

9. Vent:

The capacitors are provided with a pressure resistive controlled safety vent formed on the bottom of the Container. The vent is designed to rupture in the event that higher internal pressure is developed by Circuit malfunction or capacitor misuse.

10. High Altitude:

These capacitors are capable of withstanding in transit conditions where storage temperature may range from -40to+105°C and the altitude may reach 200,000 feet.

11. Cleaning Agents:

Halogenated hydrocarbon cleaning solvents are not recommended for use in cleaning capacitors supplied With exposed end seals where cleaning with a halogenated solvent is desired, capacitors should be ordered with a Epoxy-coated end seal.